


SPECIFICATION

Product number: EC370AYA540

Product type : Bar display

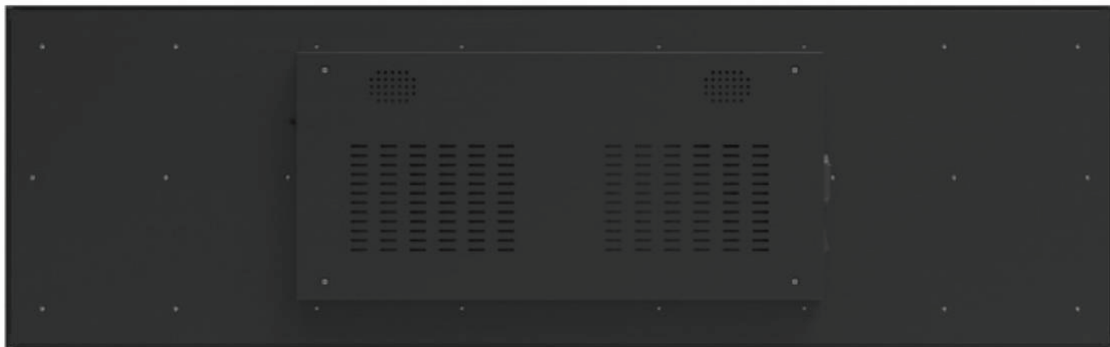

Checked by	Rechecked by	Approved by
Comments	Approved by	Company's seal
Customer's Name:		

Please send the original back to us after you have approved and signed.

Modify History


Ver.	Page	Revised Descriptions	Date	Revision	Approval
REV.1.0	ALL	TO	2025.05.16		

Product Parameter:

37"		Specifications	Units/Number	Notes
Model				
	Dimension	900(L)*264.5(W)*45(H)	MM	
	Shell material	Black fine sand pattern	-	
	Gross Weight	8.8	Kg/gross	
Screen Parameters	Display Size	878.11(L)*242.68(V)	MM	
	Display- resolution	1920*540	Pixel	
	Brightness	350	Cd/m ²	
	Contrast ratio	5000: 1	-	
	Display scale	16:4.4	-	
	Viewing angle	89/89/89/89	-	
	Pixel pitch	0.449*0.449	MM	
	Display color	16.7	M	
Electrical	Maximum power	≤35	W	
	Standby power	≤1	W	
	Supply Voltage	12V	V	
	Horn	5W/8 Ω	-	
WorkStorage	Operating temperature	0-50	°C	
	Working- humidity	10%~80%	%hr	
	Storage temperature	-20-50	°C	
	Storage Humidity	10%~80%	%hr	
Power interface		AC 110-240V		

37"		Specifications	Units/N umber	Notes
Model				
Functional configuration	CPU	TA40i, quad-core, the highest main frequency is 1.2GHz		
	Operating System	Android 7.1		
	Memory Storage	EMMC is standard with 8G (16/32G optional)		
	built-inROM	2KB EEPROM		
	HDMI Out	1, supports 1080P output		
	HDMI import	/		
	Support Video-Formats	Supports wmv, avi, flv, rm, rmvb,mpeg, ts,mp4, etc		
	Support Image-Formats	Supports BMP, JPEG, PNG, GIF		
	Audio Input/Output	Supports left and right channel output, with built-in dual 4R/20W and 8R/10W power amplifiers		
	Headphone Output	/		
	USB Interface	2 USB HOST, 3 USB ports		
	Serial Port	2 serial TTL sockets, 2 serial RS232 sockets		
	Network Support	4G, Ethernet, support WiFi/ Bluetooth 4.0, wireless peripheral expansion		
	Memory Card	Supports SD cards		
	RTC	Support multi-time timing on and off		
System Upgrade	Support local SD, USB upgrade			

Product Rendering:



Product Dimension Drawing:

